

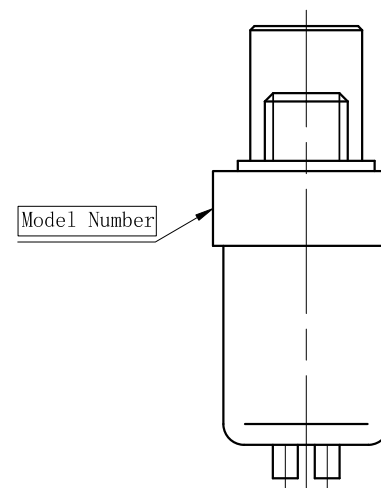


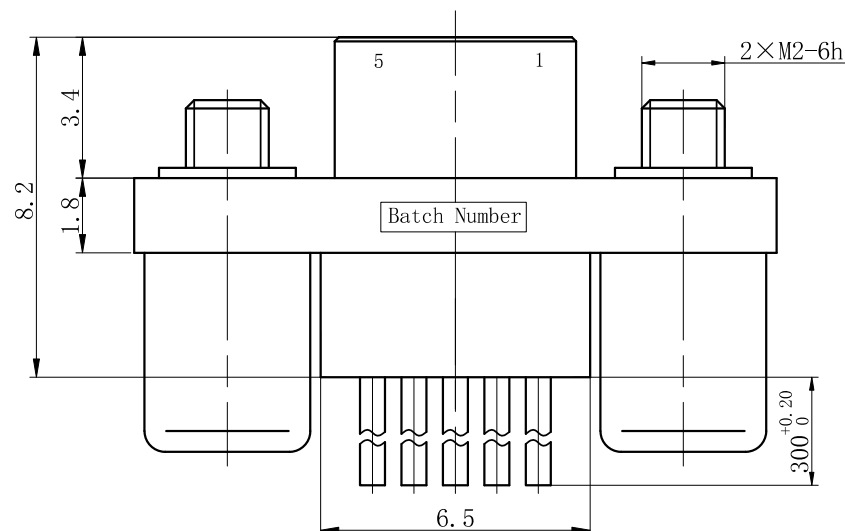

The wire length is 300mm; AFR-250-0.07mm²; White Wire and wiring harness processing requirements shall be subject to the customer's product order requirements.

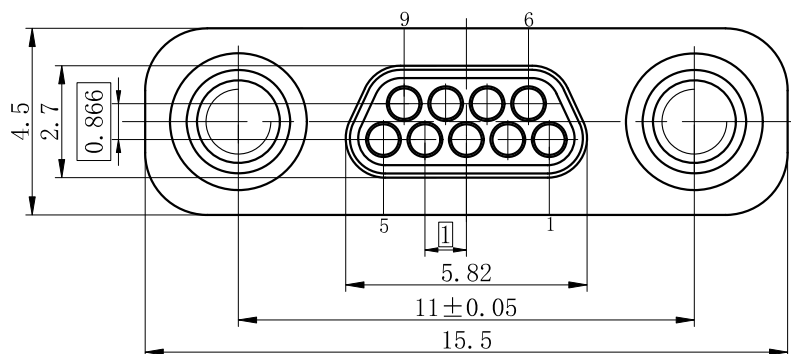

Ordering information

MDM1-9 P L G
① ② ③ ④ ⑤

- ① MDM1 - Series;
- ② 9 - Contact layout;
- ③ P - Contact type is Pin;
- ④ L - The L-shaped Free end locking accessories;
- ⑤ G - Company identification.

Specification:

- 1.Environment temperature: -55℃~+125℃;
- 2.Vibration: 10Hz~2000Hz 196m/s²;
- 3.Relative Humidity: +40℃, 98%;
- 4.Shock: 490m/s² 6ms;
- 5.Rated current: 2A max;
- 6.Contact resistance: ≤12mΩ;
- 7.Insulation resistance: ≥5000MΩ;
- 8.Dielectric strength: 500V;
- 9.Durability: 500times.

AROC INTEL CO., LIMITED
www.aroc.cc

Model:

MDM1-9PL-G

Signature

Date

Design Zhong Fu 20260708

Auditing Jin Li 20260708

Approve Jiawei Hu 20260708

Denomination: Plug

Phase marker	DIN	Scale	Sheet of	REV
	A4	4:1	1	