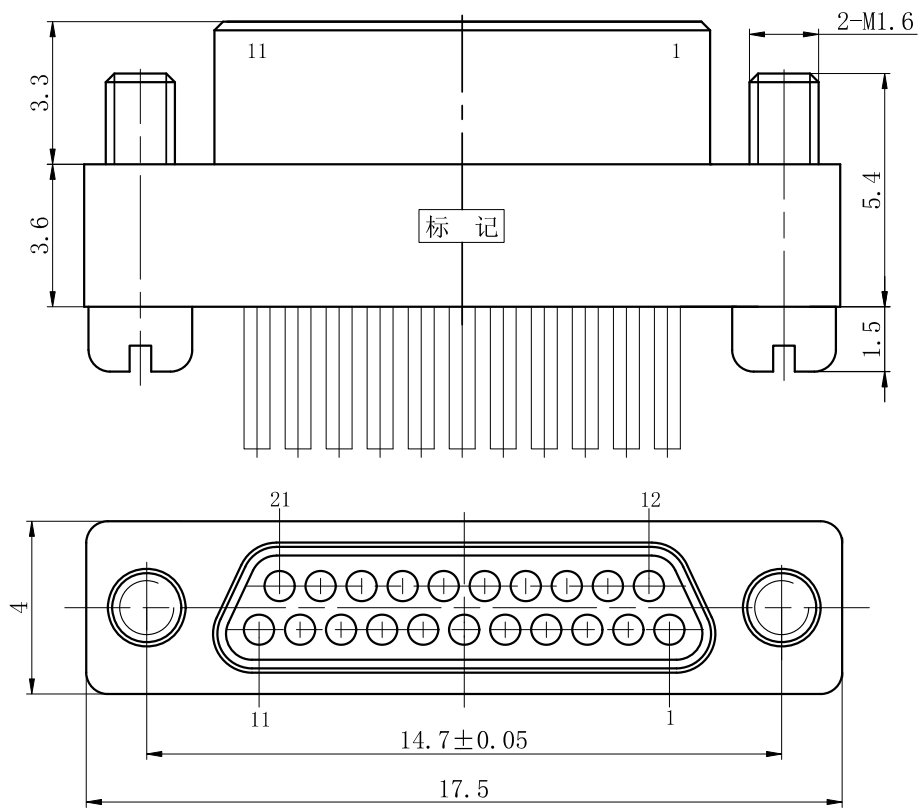


The wire length is 300mm; AFR-250-0.07mm²; White Wire and wiring harness processing requirements shall be subject to the customer's product order requirements.

Ordering information

J20J- 21 TJ -JC-300
① ② ③ ④ ⑤

- ① J20J- Series;
- ② 21- Contact layout;
- ③ TJ- Contact type is Plug;
- ④ JC- Locking screw, M1.6-6h;
- ⑤ 300-Length:300mm;

- Specification:
- 1.Environment temperature: -55℃~+125℃;
 - 2.Vibration: 10Hz~2000Hz 196m/s²;
 - 3.Random vibration: Power spectrum density0.4G²/Hz root mean square value of total acceleration 23.1G;
 - 4.Shock: 980m/s² 6ms;
 - 5.Rated current: 2A;
 - 6.Contact resistance: ≤15mΩ;
 - 7.Insulation resistance: ≥5000MΩ 300V(DC);
 - 8.Dielectric strength: 500V;
 - 9.Durability: 500times.

AROC INTEL CO., LIMITED				Model:			
www.aroc.cc				J20J-21TJ-JC-300			
Signature		Date		Denomination: Plug			
Design	Zhong Fu	20260519					
Auditing	Jin Li	20260519		Phase marker	DIN	Scale	Sheet of REV
Approve	Jiawei Hu	20260519			A4	4:1	1